




# TECHNICAL DATA SHEET

Product name	PET INSULATION TAPE (DS-515)		
Application	Electronic insulation of transformers and coil		
Structure			
	Code	DS-515	DS-515F
	<ul style="list-style-type: none"><li>- PET film backing thickness</li><li>- Adhesive thickness</li><li>- Flame retardant</li><li>- Color</li></ul>	<p>0.025mm / 0.05mm 0.025mm ~ 0.05mm without various</p>	<p>0.025mm / 0.05mm 0.025mm ~ 0.05 mm with yellow, white</p>
Features	<ul style="list-style-type: none"><li>- Adhesion to steel 180°</li><li>- Heat resistance</li><li>- Adhesive type</li><li>- Elongation (%)</li><li>- Tensile strength</li><li>- Breakdown voltage (kV)</li></ul>	<p>From 600gf/25mm ± 10% (from 5.88N/in ± 10%) Min. 130°C Acrylic, rubber, silicone 110% ~ 130% 130N/25mm 6.0 ~ 8.0</p>	
Sizes	<ul style="list-style-type: none"><li>- Standard width</li><li>- Standard length</li><li>- Core size (D)</li><li>- Special sizes</li></ul>	<p>3mm, 4.5mm, 5mm,... 1150mm 50M, 100M 3 inches width &amp; length following customers' request</p>	
Storage condition	Within 6 months in normal room temperature, never keep touching to the floor directly.		
Important notice	The above values are sample observed values, not the guarantee performance.		

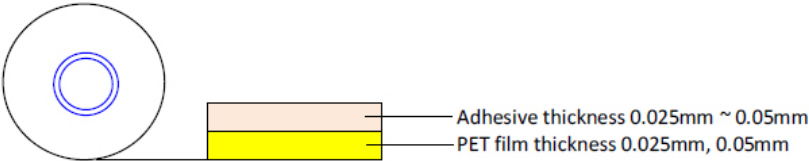